forte

Extraction Duct Cleaning Machine

It is the most effective and efficient solution to perform the services cleaning of extraction ducts in restaurants.

LENGHT 25 m | EASY TOUCH | COMPRESSED AIR 116 psi/12 cfm | ROTATION 2 DIRECTIONS | GREASE WASTE

APPLICATIONS

Circular duct | Fiber duct | Square duct | Section 200 to 1000 mm

OPTIONALS ACCESSORIES

BRUSH CENTERING DEVICE
Pneumatic actuation
COD. AC3303106

ANTI-BREAKAGE PROTECTOR
for the shaft and hose.
COD. AC3303112

CONSUMABLES



PACK 5 MIXED BRUSHES.
Steel + nylon.
For carbonized grease.
Ø200 | 300 | 400 | 500 and 600 mm COD. CP1302828



PACK 5 BRUSHES PBT.
Indicated for greasy residue of medium-high hardness. High abrasion power. Ø200 | 300 | 400 500 and 600 mm COD. CP1203030



PACK 5 NYLON BRUSHES
Indicated for the removal of fat of medium hardness.
Ø300 | 400 | 600 | 700 | 800 mm COD. CP1101520

PACK 4 BRUSHES EXTREME.
Brushes for extreme cleaning.
Includes case.
Ø300 | 400 | 500 | 600
COD. CP2300515

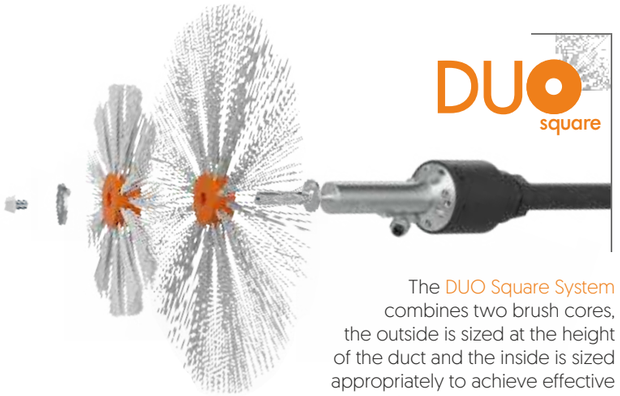

The DUO Square System combines two brush cores, the outside is sized at the height of the duct and the inside is sized appropriately to achieve effective corner brushing for square ducts.

TECHNICAL FEATURES

Motor supply (Maximum power)	Aire compressed 300 l/min 8 bar // 10.6 cfm - 8 bar
Rotation speed when empty	500 r.p.m.
Maximum torque	11,6 Nm // 102,7 ibf-in
Noise level	< 70 dB
Direction of rotation	Right / Left
Control system	Electro-pneumatic
Length of hose	25 m // 82 ft
Structure material	Stainless Steel
Dimensions (L x W x H)	1060 x 547 x 1075 mm 42 x 21,5 x 42 inches
Weight	80 kg // 176 lb