

forte

Exhaust duct cleaning system

Pneumatic rotary brush unit, for the cleaning of kitchen exhaust ducts and industrial facilities up to 1000 mm | 39.3 inch of diameter.

- Powerful pneumatic motor [11.6 Nm max. torque] necessary for to remove all types of grease and dirt.
- 30 meters | 98.4 inch of semi-rigid hose that allows to work vertically [up and down], horizontally, and to make 90° bends.
- 100% stainless steel motor for greater durability and maintenance free.


PNEUMATIC

For ducts up to

1000 mm | **39.3** inch

Rotary shaft length

30 m | **98.4** inch

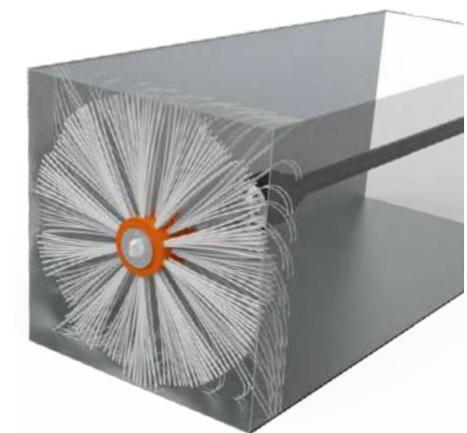

Brushes

Different materials and sizes for all types of ductwork. DUO Square system for effective cleaning in square ducts.

Carrying handle

Easy handling for transportation.


Shaft guard

Facilitates its take-up and protects it when you are on the move.

Dual direction of rotation

Left | Right



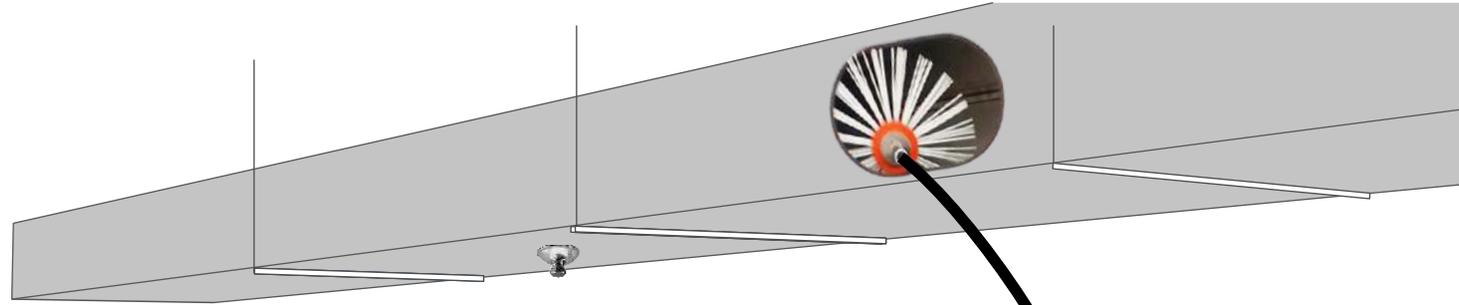

WRIST REMOTE CONTROL

Optional accessory that allows the equipment to be controlled by a single operator.

IFOAM generates the active foam.

COMEGRAS ultra concentrated degreaser.



AIR COMPRESSOR AR20
Paddle system. (Not included)



OPTIONAL ACCESSORIES ▼




BRUSH CENTERING DEVICE.
For ducts from 500 mm | 19.7 inch to 1000 mm | 39.3 inch
AC33031030



ANTI-BREAKAGE PROTECTOR for the shaft and hose.
COD. AC3303112

CONSUMABLES ▼



PACK 5 MIXED BRUSHES. Steel + nylon. For carbonized grease.
Ø200 | 300 | 400 | 500 | 600 mm
Ø7.8 | 11.8 | 15.7 | 19.7 | 23.6 inch
CPI302828

PACK 5 BRUSHES PBT. Indicated for fatty residue of medium-high hardness. High abrasion power.
Ø200 | 300 | 400 | 500 | 600 mm
Ø7.8 | 11.8 | 15.7 | 19.7 | 23.6 inch
CPI203030

PACK 5 NYLON BRUSHES
Indicated for the removal of medium-hard grease.
Ø300 | 400 | 600 | 700 | 800 mm
Ø11.8 | 15.7 | 23.6 | 27.5 | 31.5 inch
CPI101520



PACK 4 BRUSHES EXTREME. Brushes for extreme cleaning. Includes case.
Ø300 | 400 | 500 | 600 mm
Ø11.8 | 15.7 | 19.7 | 23.6 inch
CP2300515



COMEGRAS
Ultraconcentrated degreaser.
10 kg | 22 lb Jerrycan. PQ8100122



The centering device fixes the brush in the **center of the duct.**

TECHNICAL FEATURES

forte

Motor supply (Maximum power)	Compressed air 300 l/min 8 bar 10,6 cfm – 8 bar
Rotation speed when empty	500 r.p.m.
Par máxima potencia	6,5 nm 57,5 lbf.in
Maximum torque	11,6 nm 102,7 ibf.in
Noise level	< 70 dB
Direction of rotation	Right Left
Control system	Pneumatic
Hose length	30 meters 98.43 ft
Structure material	Stainless steel and HDPE
Dimensions	1025 x 1162 x 430 mm 40.3 x 45.7 x 17 inches
Weight	67 kg 147.7 lb